

Radius™ Tables



Product Registration

Registering your new BDI product allows us to send you important product updates, service information and helpful hints related to your BDI products. Register today, and you will be entered to win free a BINK table from BDI: www.bdiusa.com/register

bdiusa.com
customerservice@bdiusa.com

Placement and Maintenance

Your Radius Table is designed for indoor use on level floors. Clean wood veneer and steel parts with a moist cloth.


Radius is engineered for easy assembly. Carefully follow this procedure to prevent any damage. Do not use power tools for assembly of this product.

Step 1

Unpack and identify the parts listed below. The assembly workspace should be a non-marring surface such as carpet. For missing hardware pieces, contact BDI Customer Service at: customerservice@bdiusa.com. For all other concerns, please contact your BDI retailer.



T1 Hex Key x 1




H1 1/4-20 x 12mm Flat head Screw



H2 1/4-20 Washer

Radius Tables

Model Number	Shape	Height of legs	# of legs	# of screws	# of washers
1730	Square Coffee	12.3"	4	16	16
1732	Rectangular Coffee	15.5"	4	16	0
1733	Rectangular End	19.6"	4	16	16
1736	Round End	19.6"	3	12	12

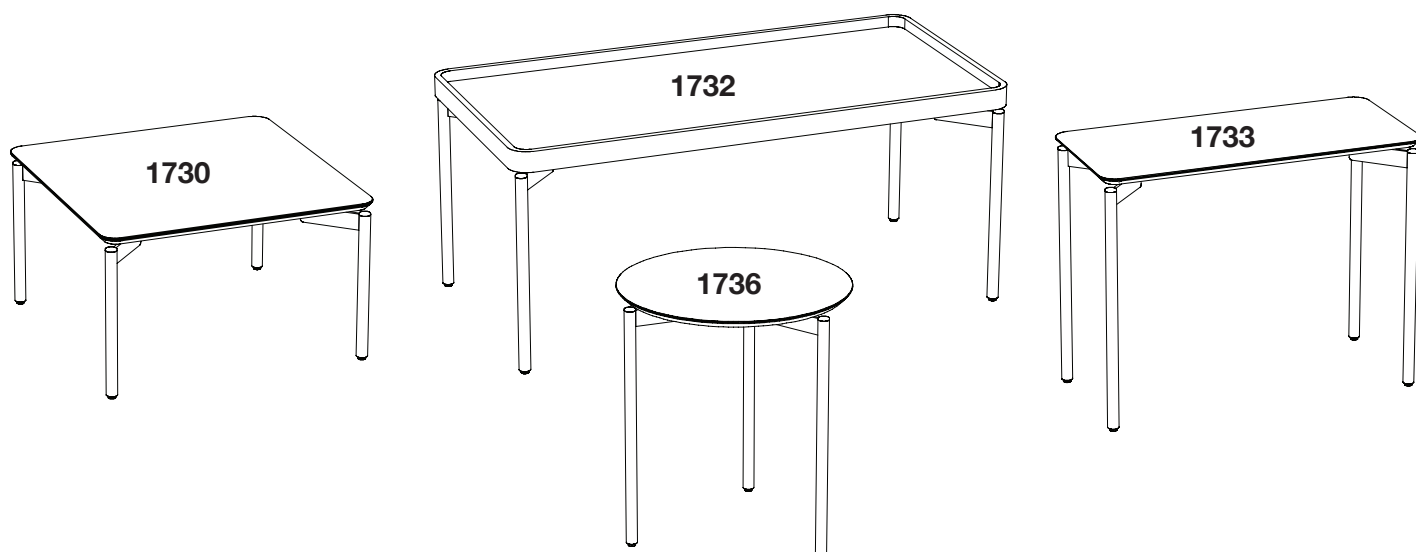

Designed by Alyssa Coletti




These distinctive product configurations are protected by US and international patents, trade dress, and/or copyright laws. Radius & BDI are trademarks of Becker Designed, Inc. All rights reserved. ©2017, BDI

Made in China. 03.28.2018 V2

Step 2 - Attach each leg with **4 screws H1** and **4 washers H2** using **Hex key T1**.

Note - Washers are **not** needed on 1732 Rectangular Coffee Table.

T1 Hex Key

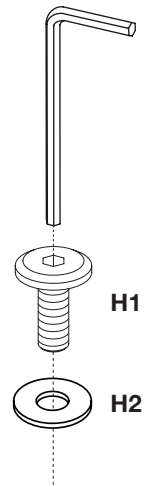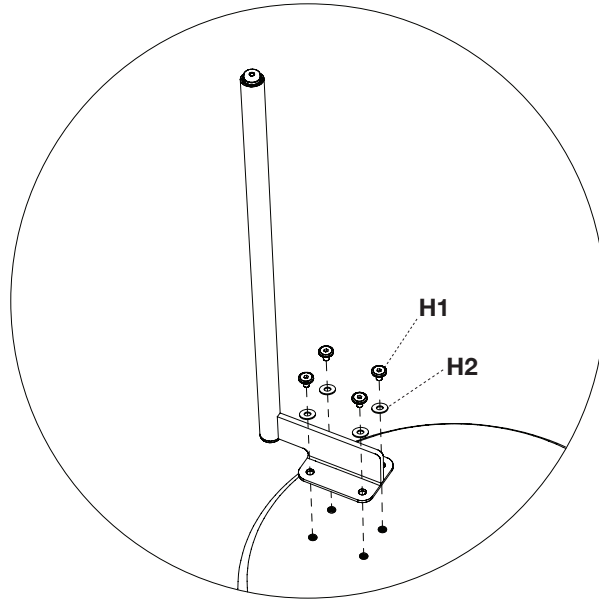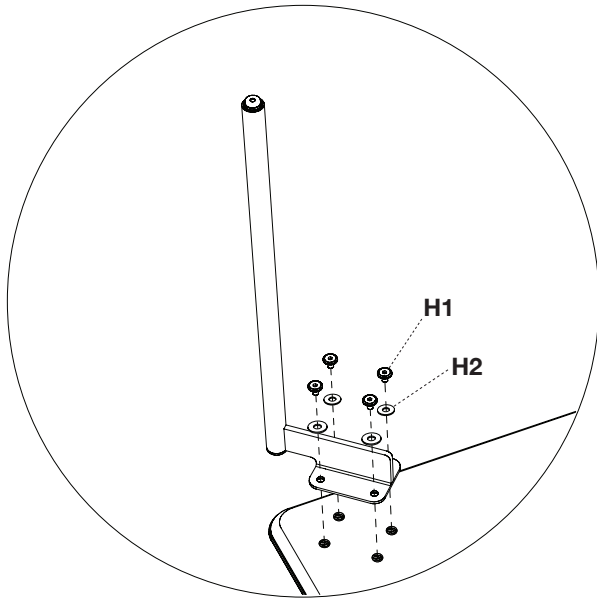

Step 3 - Your Radius Table(s) are equipped with levelers. Level your table if needed, by dialing the leveler out by hand.

